

# FTMAXI


## TOWEL FOLDER & STACKER

The FT MAXI is a highly productive, multi-use folder that classifies, folds and stacks towels. Equipped with air-jet folding, the FT MAXI processes up to 900 pieces/hour, depending on the item, the type of fold and the operator's skill.




### PRIMARY FOLD

An air jet system is used for the primary fold. The air jet is adjusted to match the size of the article. It can perform 1 fold (in half) or 2 folds (French or 1/3 type).



### SECONDARY FOLD

A conveyor reversing system and powerful air jet, perform 1 or 2 cross. The elastic belts used in the cross folding contribute to a quality fold.

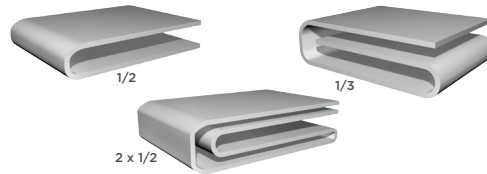

### STACKING

The FT MAXI automatically selects and stacks items into three categories. The system includes a discharge conveyor configurable with left, right, return to feed or away from the operator and onto a transport conveyor.



## PRODUCT / FEATURES

### MAXIMUM PIECE SIZE

- Width: 4 feet / Length: 7.8 feet

### VERSATILE

- Offering a compact footprint, the FT MAXI automatically stacks and classifies items according to dimensions.

### INDEPENDENT FEED TABLE

- The folder is fed manually on an independent feed table. The conveyors are able to stop — allowing operators to feed linen without affecting production.
- High-quality feeding is assured. The table is fully ergonomic and height adjustable.


### PRIMARY FOLDING WITH EXCLUSIVE BLOWING SYSTEM

- An air jet blowing system allows small and medium-sized articles to be folded without stopping the conveyor — improving productivity while maintaining folding quality.

### SECONDARY FOLDING USING REVERSING BELTS AND BLOWING



INDEPENDENT FEED TABLE

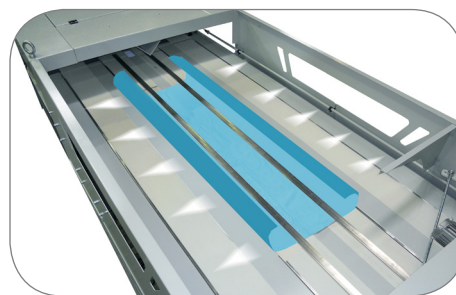

PRIMARY FOLDING



SECONDARY FOLDING

- The elastic belts that perform the cross folding are extremely flexible, providing a high-quality fold while minimizing maintenance downtime.

### EASY-TO-USE TOUCH SCREEN GRAPHIC CONTROL

- The FT MAXI folder incorporates a control and programming system. A system of easy-to-use icons guide the user in operating the machine.

### OPTIONS


- The FT MAXI comes standard with three stackers, with an option for a fourth. Completed stacks are automatically advanced onto a discharge conveyor, which can exit to the left, right, return to feed, or away from the operator and onto a transport conveyor.

# FTMAXI

## TOWEL FOLDER & STACKER

### PRODUCT SPECS

Usable Feed Width <i>inch</i>	49.1
Feed Height <i>inch</i>	35 ± 1
Maximum Item Dimensions <i>inch</i>	47.2 x 92.5
Minimum Item Dimensions <i>inch</i>	10.2 x 9.8
Net Weight <i>lbs</i>	2425
Crated Weight <i>lbs</i>	2646
Machine Width <i>inch</i>	
machine only	57.3
with stacker	76.9
Machine Depth <i>inch</i>	
machine only	165.7 ± 0.4
with rear stacker	205
with front stacker	214
Machine Height <i>inch</i>	55.2
Shipping Dimensions <i>inch</i>	
WxDxH	177 x 70.9 x 78.7
Electrical Power <i>KVA</i>	2.5
Compressed Air Connection <i>inch</i>	1/2
Operating Pressure	6 - 10
Available Voltage <i>Amps</i>	
208-240/60/3	
440-480/60/3	

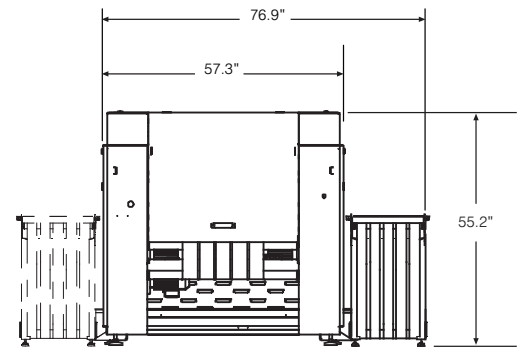

\* Specifications subject to change without notice or obligation. Contact Girbau Industrial at (800) 256-1073 for dimensions not shown or for clarification.

